



# 数显尺

# S\_Scale WORK

## 描述

- 最大移动速度: 2 m/sec
- RS232 或 USB 数据输出
- 可由外接供电数据线供电
- 易于装配



标配锁紧装置

6mmLCD显示器

不锈钢边条坚固耐用

铝制滑动块, 塑胶外壳, 可旋转超过 270°




SIS Smart Inductive System

WATER RESISTANT

IP65

POWER






# 数显尺

# S\_Scale WORK

## 图纸尺寸

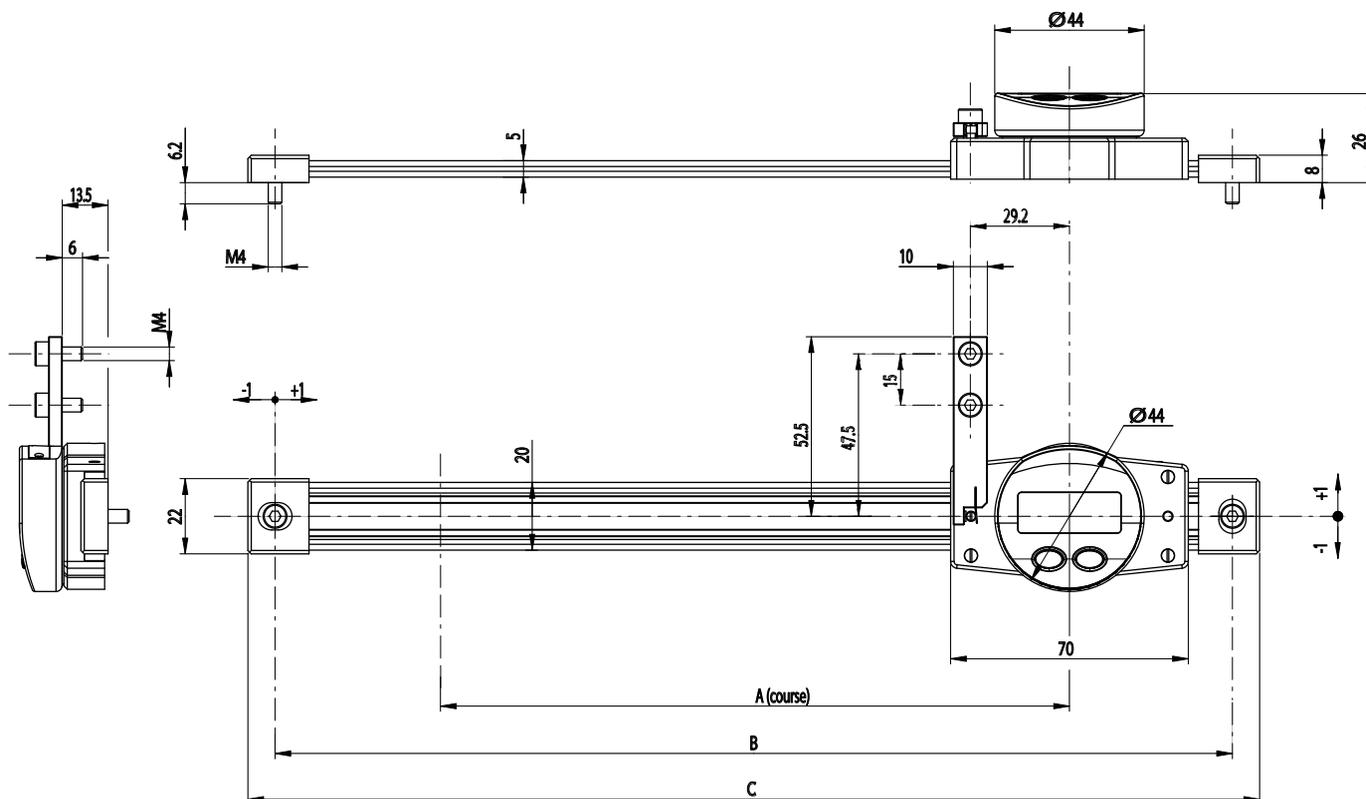

## 技术参数

		816.1015	816.1020	816.1030	816.1060
测量范围	mm	150	200	300	600
类型		H/V	H/V	H/V	H/V
最大允许误差	μm	20	20	30	30
重复性 <sup>1)</sup>	μm	10	10	10	10
分辨率		0.01	0.01	0.01	0.01
A	mm	185	235	335	665
B	mm	282	332	432	762
C	mm	298	348	448	778
数据接口 : power		USB / RS232 / Wireless <sup>2)</sup>			
选择测量方向			•		
预设值功能			•		
2基准模式			•		

<sup>1)</sup> ± 1 数字

<sup>2)</sup> 参考数据线部分

